






TER 2




TER 3



TER 4

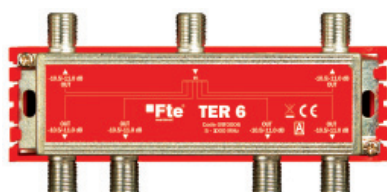

TER 6

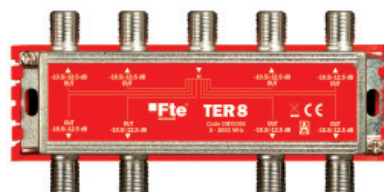

TER 8

Technical specifications. 5-1000MHz A-class splitters, F connection. TER series

	TER 2	TER 3	TER 4	TER 6	TER 8
Code	0970002	0970003	0970004	0970006	0970008
Band (MHz)	5-1000	5-1000	5-1000	5-1000	5-1000
Return path (MHz)	5-30 / 5-65	5-30 / 5-65	5-30 / 5-65	5-30 / 5-65	5-30 / 5-65
Outputs number	2	3	4	6	8
Insertion loss (dB) (TYP/MAX)	5-300 MHz	3,2 / 3,5	5,4 / 5,9	6,1 / 6,9	9,3 / 10,3
	300-606 MHz	3,3 / 3,5	5,5 / 6,0	6,2 / 7,0	9,5 / 10,5
	606-1000 MHz	3,5 / 3,8	6,0 / 6,8	7,0 / 7,8	10,0 / 10,8
Decoupling between outputs (dB)	5-300 MHz	>35	>35	>35	>35
	300-606 MHz	>30	>25	>25	>25
	606-1000 MHz	>30	>25	>25	>25
Return loss (dB)	IN	>24	>20	>18	>18
	OUT	>22	>20	>18	>18
Screening Factor (dB)	>100	>100	>100	>100	>100
Impedance (Ω)	75	75	75	75	75
Current pass	No	No	No	No	No
Connectors	F female	F female	F female	F female	F female
Plastic support	Included	Included	Included	Included	Included
Dimensions without support (mm) (An. x Al. x P)	51,9 x 50 x 16,5	74,2 x 50 x 16,5	74,2 x 50 x 16,5	118 x 60,3 x 17,5	118 x 60,3 x 17,5
Dimensions with support (mm) (An. x Al. x P)	57 x 50 x 26,5	79 x 50 x 26,5	79 x 50 x 26,5	123,3 x 60,3 x 27,5	123,3 x 60,3 x 27,5
Packing quantity	1 / 10 / 120	1 / 10 / 120	1 / 10 / 120	1 / 5 / 60	1 / 5 / 60

Passive elements assembly with plastic base

1. Assembly of plastic base inside the register or wall. Fix with screws.



2. Cables connection to passive element.



3. Press to fix the passive element to the base.

