

WIRELESS OUTDOOR CPE / AP

CPE 300 24 V2



- ✓ 300 Mbps / 2.4 Ghz
- ✓ Supports high user density
- ✓ Multiple SSID
- ✓ Long-range 1km (*)
- ✓ AP Mode / Router / Repeater / WISP
- ✓ PoE 24Vdc power supply



EKSELANS BY ITS



CPE 300-24V2



Installation diagram:

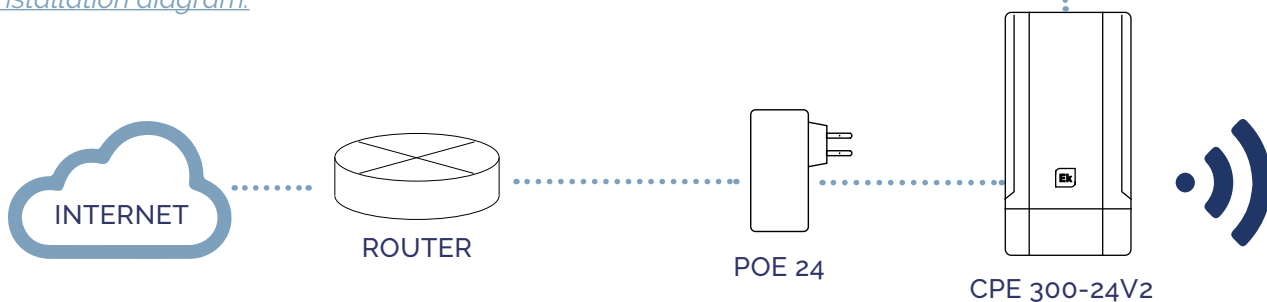




TABLA TÉCNICA

REFERENCE	CPE 300-24V2
Code	333013
Hardware	
Antenna	1 x 8 dBi
Transmission power	Max. 20 dBm (IEEE802.11 b/g/n) - 2.4Ghz (EK recommends setting the maximum transmitting power according to the current legislation of each country)
Half-power beam width	H: 60° V: 5°
Reset button	Reset and factory settings
Software	
Programming	Network management WEB
Options	VLAN, QoS, bandwidth control, limitation "broadcast storm", ...
Connections	
Ethernet Interface	2 x 10 /100 Mbps Ethernet ports
Power Supply	PoE: 24V, 12Vdc/1A Connector
Wireless	
Operating mode	AP, Gateway, Repeater, SUPER WDS
Throughput 2.4 GHz	IEEE802.11B: 11MBPS IEEE802.11G: 54MBPS IEEE802.11N: 300MBPS
Frequency	2.4 GHz
Channel	1 - 13 2.4 GHz
Modulation mode	OFDM, DSSS
Coding	BPSK, QPSK, 16QAM and 64QAM / DBPSK, DQPSK, CCK
Encryption	802.11i Security: WEP-64/128, TKIP(WPA-PSK) and AES(WPA2-PSK)
General	
Working temperature	-40°C - 55°C
Power consumption	Max. 20 W
Dimensions	16 x 9 x 6 cm

(*) The maximum distance will depend on the conditions of use of the AP