

Ek**EKSELANS BY ITS**


UHF OUTDOOR ANTENNAS

**EK MINI L2 · EK 70 L2 · EK 100 L2
DAP 22**


Lte2

easyU


- ✓ Waterproof compact dipole with F connector
- ✓ LTE 2 694 MHz Filter
- ✓ Special wing nuts
- ✓ 100% closed elements.
- ✓ Elevation adjustment
- ✓ easyU flange
- ✓ quick assembly

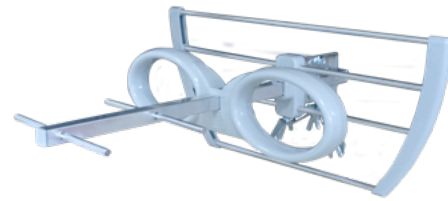

EK MINI L2

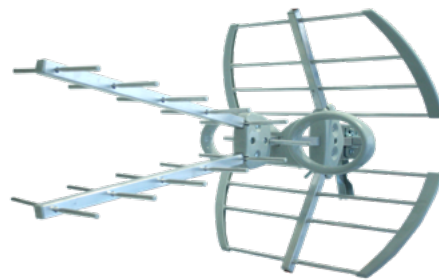

EK 70 L2

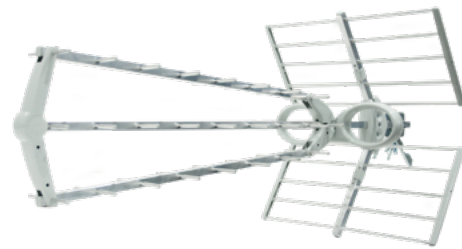

EK 100 L2



DAP 22

Access the [video](#) and discover the advantages of easyU



Dipole



EasyU Flange Wing Nuts



Easy assembly



TECHNICAL TABLE

| REFERENCE | | EK MINI L2 | EK 70 L2 | EK 100 L2 |
|-----------------------------|-----------------|------------|----------|-----------|
| Code | | 013012 | 013015 | 013014 |
| Channels | | 21-48 | 21-48 | 21-48 |
| Frequency Range | MHz | 470-694 | 470-694 | 470-694 |
| Gain | dBi | 12 | 14,5 | 17,5 |
| Length | mm | 455 | 745 | 1070 |
| Front-to-back ratio | dB | 14 | 15 | 20 |
| Horizontal beamwidth (-3dB) | ° | 42 | 38 | 33 |
| Polarisation | dB | H/V | | |
| Wind load | N (130 Km/h) | 20 | 35 | 110 |
| Packaging | uds. | 6 | 1 | 6 |

| REFERENCE | | DAP 22 |
|------------------|------|---------|
| Code | | 013031 |
| Gain active mode | dB | +22dB |
| Gain pasive mode | | -1dB |
| Output level | dBuV | 104 |
| Power supply | Vdc | 12 a 24 |
| Consumption | mA | 30 |